



# NEWPORT

## COMMERCIAL SERIES

MODEL NPC138 & NPC200



**NPC138**  
1-3/8" THICK  
R-VALUE 12

**NPC200**  
2" THICK  
R-VALUE 18

**26**

**CFC/HCFC  
FREE  
POLYURETHANE  
CORE**

**HIGH  
THERMAL  
EFFICIENCY  
RATING**

**GAUGE  
WOODGRAIN  
EMBOSSED  
STEEL FACE**

**COMMERCIAL & INDUSTRIAL OVERHEAD DOORS**



# Polyurethane Insulated Steel Doors

**General Doors Corporation Newport Commercial Series** are our most versatile insulated door models. Available in both 1-3/8" thick and 2" thick, these highly energy efficient door systems are ideal for medium sized commercial applications of all types. Sections are built from a continuous foaming process of CFC/HCFC-free polyurethane insulation bonded between steel skins to provide exceptional strength and structural integrity.

## Features

- Perfect choice when aesthetics are a key consideration.
- Available in three panel options: Light Ribbed, Flush and Short Raised.
- Continuous reinforcing strip for hardware attachment.
- Thermal break between exterior and interior skins
- High strength to weight ratio.

| Specifications       | NPC138                                      | NPC200                                      |
|----------------------|---------------------------------------------|---------------------------------------------|
| Door Thickness       | 1-3/8"                                      | 2"                                          |
| R-Value              | 12                                          | 18                                          |
| Face Sheet Thickness | 26GA                                        | 26GA                                        |
| Steel Embossment     | Woodgrain                                   | Woodgrain                                   |
| Construction Layers  | Triple                                      | Triple                                      |
| Section Joint        | Tongue/Groove                               | Tongue/Groove                               |
| Maximum Width        | 16'- 2"                                     | 20'- 2"                                     |
| Maximum Height       | 14'- 0"                                     | 16'- 0"                                     |
| Warranty             | 1 yr. materials/wkshp<br>5 yr. delamination | 1 yr. materials/wkshp<br>5 yr. delamination |



## Options

- Exterior operated cylinder lock
- Exhaust ports
- Reinforcing for draw bar operator
- Black PVC recessed step plate/lift handle
- Factory installed top seal
- Extended life torsion springs (25M, 50M, 100M cycle)
- Wind load package available

## Color Options



Municipal


Rural/Agricultural



# Lite Options

34" x 16"  
24" x 12"  
24" x 8"

- Black polymer frame
- Available for Light Ribbed & Flush Panel
- Insulated glass

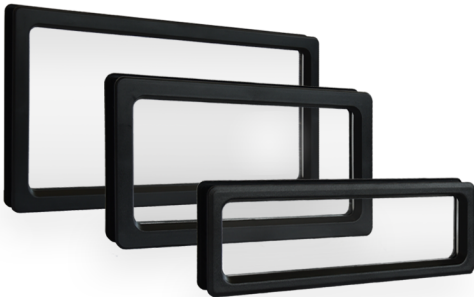


22" x 14"

- Color matched to door
- Available in all panel styles
- Single or insulated glass
- Decorative inserts available



Full View  
Aluminum  
(NPC200 only)

- Color matched to door
- Available in all panel styles
- Multiple glazing options available  
Check with factory

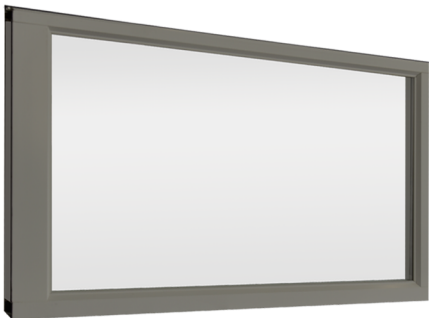

## Lite Guide

| Door Width       | Standard No. of lites* | No. of FVA panels |
|------------------|------------------------|-------------------|
| Up to 9'-2"      | 2                      | 2                 |
| 9'-3" to 12'-2"  | 3                      | 3                 |
| 12'-3" to 16'-2" | 4                      | 4                 |
| 16'-3" to 20'-2" | 5                      | 5                 |

\*May vary using 34" x 16" lites in special widths. Check with factory.

High Density  
Polyurethane Core  
R-Value 12 (NPC138)  
R-Value 18 (NPC200)

Insulated Glass Lites  
5 available options

Galvanized steel end caps  
for added strength


Bulb Seal  
prevents air leaks

Thermal Break  
prevents heat transfer


Continuous full width  
horizontal steel  
reinforcing strip for  
hinge attachment

Pre-painted, hot-dipped  
galvanized steel sheets,  
woodgrain embossed  
with a Light Ribbed pattern  
(26 Gauge)

Bulb shaped weatherstrip  
with continuous retainer  
full width of door

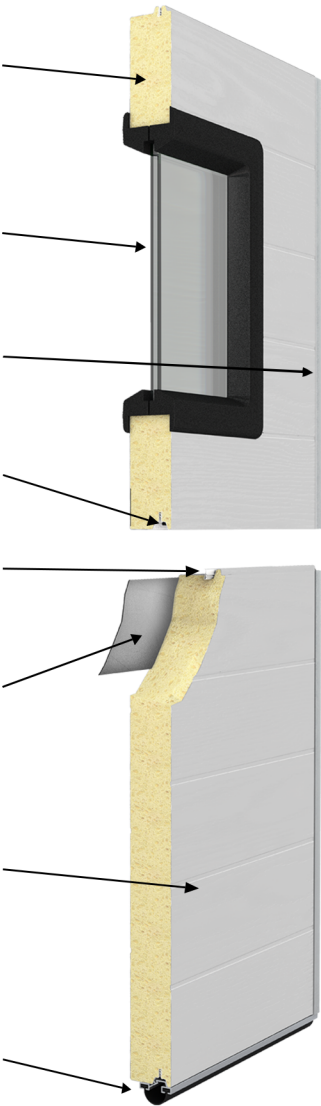

## Additional Panel Options



Flush



Short Raised

## Commercial


## RV/Shop

Flush Panel  
w/ Frosted Full View Section

Raised Panel




# TRACK SELECTION

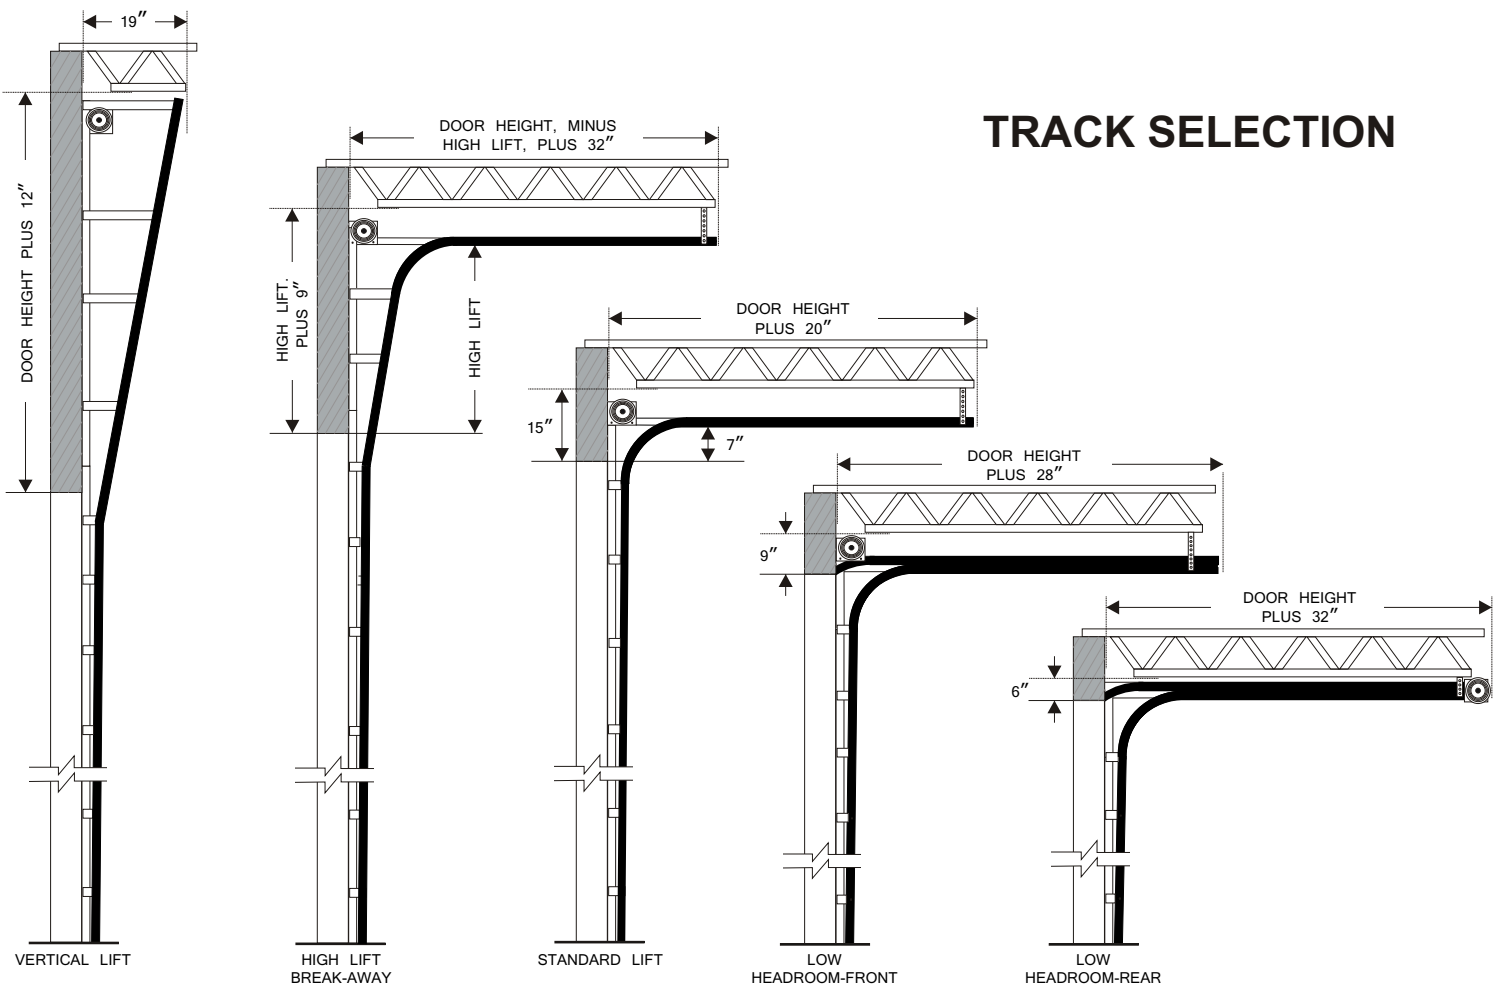

| TYPE OF LIFT             | HEADROOM             | SIDEROOM | ROOM DEPTH - MANUAL                 | ROOM DEPTH - MOTOR OPERATED                  |
|--------------------------|----------------------|----------|-------------------------------------|----------------------------------------------|
| STANDARD                 | 15"                  | 4-1/2"   | DOOR HEIGHT PLUS 20"                | DOOR HEIGHT PLUS 48"                         |
| HIGH LIFT                | HIGH LIFT PLUS 9"    | 4-1/2"   | DOOR HEIGHT LESS HIGH LIFT PLUS 32" | ONLY SIDE MOUNTED CAN BE USED - 24" ONE SIDE |
| VERTICAL LIFT            | DOOR HEIGHT PLUS 12" | 4-1/2"   | 19" INTO ROOM                       | ONLY SIDE MOUNTED CAN BE USED - 24" ONE SIDE |
| LOW HEADROOM FRONT(REAR) | 9"(6")               | 6"       | DOOR HEIGHT PLUS 28"(32")           | DOOR HEIGHT PLUS 60"                         |

\*NOTE: CLEARANCES LISTED ABOVE ARE MOST COMMON, LARGER APPLICATIONS MAY REQUIRE ADDITIONAL CLEARANCE. CHECK WITH FACTORY.

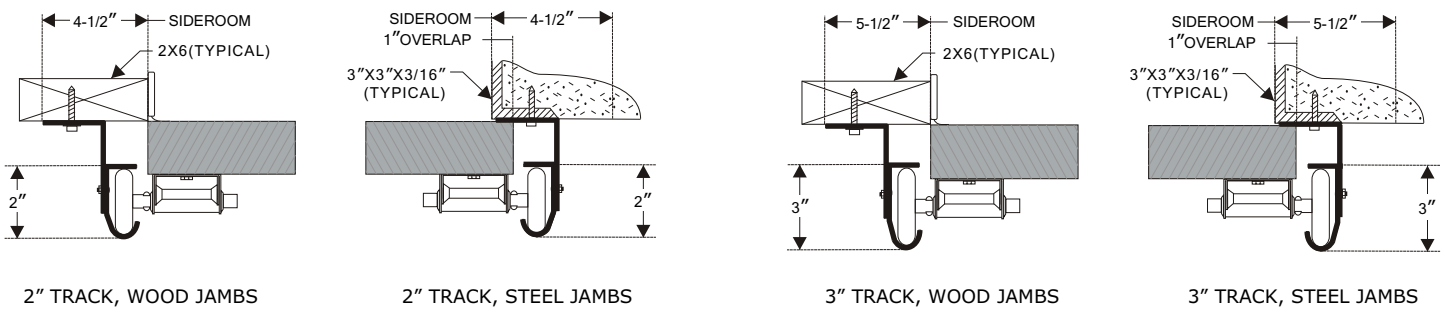

Meets or exceeds standards of ANSI/DASMA 102-2011, Specifications for Sectional Doors.

**Green Building Benefits**

- Optimize energy performance from insulation value
- Recycled content and recyclable material
- Product longevity
- Regional manufacturing(less transportation)

1 Monroe Street  
PO Box 205 Bristol, PA 19007-0205  
215.788.9277 Fax: 215.788.9450  
general-doors.com  
sales@general-doors.com



**Your Local Authorized General Doors Distributor:**

**HENDERSON'S GARAGE DOOR**  
**CORINNA, MAINE**  
**207-991-1547**

